



# **OPERATION MANUAL**

## **BROASTER® 2400XP**

### **PRESSURE FRYER w/SMART TOUCH**

**Be sure ALL installers read, understand, and have access to this manual at all times.**



Genuine Broaster Chicken®, Broasted®, Broaster Chicken®, Broaster Foods®, and Broasterie® are registered trademarks. Usage is available only to licensed operators with written authorization from the Broaster Company.

**The Broaster Company**  
2855 Cranston Road, Beloit, WI 53511-3991  
608/365-0193 [broaster.com](http://broaster.com)



## FOR YOUR SAFETY

Do not use or store gasoline or other flammable vapors or liquids in the vicinity of this or any other appliance.

**⚠ WARNING** Improper installation, adjustments, alteration, service or maintenance can cause property damage, injury or death. Read the installation, operating and maintenance instructions thoroughly before installing or servicing this equipment.

For the sake of safety and clarity, the following words used in this manual are defined as follows:

**⚠ DANGER** Indicates an imminently hazardous situation which, if not avoided, could result in serious injury or death.

**⚠ WARNING** Indicates a potentially hazardous situation which, if not avoided, could result in serious injury or death.

**⚠ CAUTION** Indicates a potentially hazardous situation which, if not avoided, could result in minor injury, property damage or both.

All adjustments and repairs shall be made by an authorized Broaster Company representative.

If there is a power failure, turn cook/filter switch OFF. On the Model 2400GH, also slide switch on gas valve OFF. DO NOT attempt to operate unit during a power failure.

**⚠ WARNING** Failure to read and understand this manual completely could result in serious injury or death. Be sure ALL operators read, understand and have access to this manual at all times.

**⚠ WARNING** Rags or paper containing cooking oil can catch fire if exposed to heat. Laundering will not remove the oil. Dispose of all oil-soiled papers and rags in a trash container that is in a ventilated area away from all cooking equipment or other heat sources such as direct sunlight.

**⚠ WARNING** If at any time the **POWER ON** light does not turn off when the power switch is moved to the **OFF** position, disconnect the power to the fryer and contact your local Broaster Company representative for service immediately.

**⚠ WARNING** **DO NOT** operate unit without filter pan and filter pan cover in its proper position. Filter pan cover must be wiped clean after each filtering cycle. Make sure Pressure Relief Valve and Pressure Gauge ports on bottom of cover are clear of any oil or grease buildup.

**⚠ WARNING** Make sure Pressure Relief Valve and Pressure Gauge ports on bottom of cover are clear of any oil or grease buildup.

**2400GH:** Post, in prominent locations, instructions to be followed in the event that the user smells gas. This information can be obtained from your local gas supplier.

cont'd on next page

**WARNING**

Make sure a restraining device is used that complies with the Standard for *Commercial Gas Ranges*, ANSI Z83.11/ CSA 1.8 to guard against transmission of strain to the gas connectors.

**DANGER**

Failure to restrain the fryer could allow it to move, causing hot shortening to spill out, or a possible break in the gas line causing an explosive condition.

# TABLE OF CONTENTS

<b>1 - LIMITED WARRANTY .....</b>	<b>1 - 1</b>
<b>2 - OWNER'S RESPONSIBILITY .....</b>	<b>2 - 1</b>
<b>3 - INSTALLATION INSPECTION .....</b>	<b>3 - 1</b>
<b>4 - GETTING TO KNOW YOUR BROASTER PRESSURE FRYER.....</b>	<b>4 - 1</b>
<b>5 - PRE-COOKING PREPARATIONS .....</b>	<b>5 - 1</b>
O-RING LUBRICATION .....	5 - 1
COVER CHECK.....	5 - 1
COOKING OIL.....	5 - 1
Liquid Oil.....	5 - 1
Solid Shortening .....	5 - 1
OIL LEVEL.....	5 - 2
FOOD AND CONDIMENTS.....	5 - 2
2400GH LIGHTING INSTRUCTIONS .....	5 - 3
Start Up.....	5 - 3
Shut Down .....	5 - 3
<b>6 - SMART TOUCH CONTROL PANEL .....</b>	<b>6 - 1</b>
COOK TAB .....	6 - 2
Cook Time Display .....	6 - 2
Temperature Display .....	6 - 2
Select Preset Display .....	6 - 3
Cycles Since last Filtered .....	6 - 3
FILTER TAB .....	6 - 4
SETUP TAB .....	6 - 5
PIN Number .....	6 - 5
Setup Display .....	6 - 5
Time & Date Adjustment .....	6 - 5
Temperature Adjustment .....	6 - 5
Energy Save Setting .....	6 - 6
Pin Maintenance .....	6 - 6
Presets .....	6 - 7
Name Edit .....	6 - 7
Position Edit .....	6 - 7
Time & Temperature Edit .....	6 - 7
Auto Comp On / Off .....	6 - 7
Active .....	6 - 7
Add New .....	6 - 8
Menu Transfer .....	6 - 8
Export Menu .....	6 - 8
Load Menu .....	6 - 9
Shortening Management .....	6 - 9
Language Selection .....	6 - 9
Alert Settings .....	6 - 9
HELP TAB .....	6 - 10

<b>7 - COOKING WEIGHT, TEMPERATURE AND TIME.....</b>	<b>7 - 1</b>
FRESH PRODUCTS .....	7 - 1
FROZEN IQF CHICKEN .....	7 - 2
2400 Broaster Recipe Product Cooking Chart .....	7 - 3
<b>8 - COOKING OIL CARE AND FILTERING.....</b>	<b>8 - 1</b>
OIL CARE .....	8 - 1
FILTERING .....	8 - 2
FILTERING HINTS .....	8 - 3
<b>9 - CLEANING .....</b>	<b>9 - 1</b>
COOKING WELL .....	9 - 1
FOOD BASKET .....	9 - 2
UNIT SURFACES.....	9 - 2
CONDENSATE PAN.....	9 - 2
SLIDE ROD.....	9 - 2
COVER .....	9 - 2
SPLASH SHIELD .....	9 - 3
GAS SPRING COVER .....	9 - 3
PROBE GUARD & BASKET GUIDES .....	9 - 4
MINIMUM PREVENTIVE MAINTENANCE REQUIREMENTS .....	9 - 5
<b>10 - SHUTDOWN .....</b>	<b>10 - 1</b>
Nightly .....	10 - 1
Seasonal .....	10 - 1
<b>11 - TROUBLESHOOTING .....</b>	<b>11 - 1</b>
ELECTRICAL TIPS .....	11 - 1
SOLID STATE CONTROLLER TIPS .....	11 - 2
1800GH GAS TIPS .....	11 - 3
COVER, YOKE TIPS & LIFT .....	11 - 4
PRESSURE SYSTEM TIPS.....	11 - 4
PRODUCT TIPS.....	11 - 5
Fresh Chicken .....	11 - 5
Frozen IQF Chicken.....	11 - 5
FILTERING TIPS .....	11 - 6

# 1 – LIMITED WARRANTY

Subject to the terms and conditions of this warranty, The Broaster Company (Company) warrants that all equipment and parts manufactured and sold by the Company and purchased new from an authorized Broaster Distributor or Export Management Company are free from defects in material and workmanship for a period of one year from date of installation if installation is made by a qualified installer in accordance with applicable laws and regulations. Warranty coverage is extended to the original purchaser only and is void if the equipment is resold. If an authorized Company Distributor or Export Management Company notifies The Broaster Company Service Department of a warranty claim during the warranty period, and there is a warranty registration on file with the matching serial number, the Company will, upon receipt of the claim and clear photographs of the failed part, examine the information and determine if the claim can be processed without the return of the part. If the claim is deemed to be valid, the Company will then issue a credit for the price of a new part to the Distributor or Export Management Company. In some cases, at the sole discretion of the Company, it will be required that the part be returned before a claim can be processed. A claim will be considered invalid if there is any evidence that the part had been subjected to abnormal usage, had not been installed, operated or serviced in accordance with Company operating instructions, or if there is any evidence of accident, alteration or abuse of the part or the use of unauthorized repair methods. All parts replaced under this warranty carry only the unexpired term of the warranty.

The stainless steel cooking well is warranted for 10 years of repair and return only. The warranty for the cooking well covers repairs done at the Company facility only and does not cover any freight charges. A valid claim and photos must be submitted and approved before the cooking well can be returned for repair.

This warranty covers parts only and does not cover labor charges, transportation charges or other expenses in the connection with warranty service, which are the obligation of the owner unless otherwise specified in the original sales contract between the purchaser and the authorized Company Distributor or Export Management Company from which the equipment is purchased. Please refer to that contract for coverage as to those charges.

This warranty shall be void unless genuine Broaster® parts & filter paper, Bro-Clean™ filtering compound, or XL Filtering Compound and Broaster Cooking Well Cleaner is used in conjunction with the equipment.

This warranty does not apply to consumable items and supplies such as O-rings, food baskets, bulbs, gaskets and lamps.

The foregoing warranty is made in lieu of all other warranties, express or implied, and the Company specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. The Company's full obligation under this warranty, and the purchaser's sole remedy, shall be limited to replacement, reconditioning or repair as specified above.

IN NO EVENT SHALL THE COMPANY BE LIABLE TO THE ORIGINAL OWNER OR ANY OTHER PERSON FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM THE USE OR INABILITY TO USE THE EQUIPMENT COVERED HEREBY, WHETHER ARISING FROM BREACH OF WARRANTY, STRICT LIABILITY OR OTHERWISE.

The Company reserves the right to change or improve its products in any way without obligation to alter products previously manufactured.

Used Company equipment or Company equipment not purchased from an authorized distributor carries no warranty expressed or implied.





## 2 – OWNER'S RESPONSIBILITY

### It is the owner's responsibility to:

- Ensure the Broaster® Pressure Fryer is properly maintained.
- Ensure all safety devices and warning signs are in their original location and are legible.
- Allow only properly trained personnel to operate, clean and maintain a Broaster® Pressure Fryer.
- Retain this manual for future reference.
- Ensure main power supply is disconnected before the unit is serviced.
- When you sell, trade, dispose of or give away your Broaster® Pressure Fryer, you must make sure that all safety devices and warning signs are intact and legible and the operation manual is included with the unit.
- **2400GH:** Keep burner area free and clear of all combustible materials.
- **2400GH:** DO NOT obstruct exhaust flue or open area around bottom of unit at the front, back and sides which would restrict the flow of combustion and ventilation air.

If you need replacement warning signs or manuals, contact an authorized Broaster Company representative or the Broaster Company at 608/365-0193.

The Customer Service Department at the Broaster Company should be contacted at the time of sale or disposal of the Broaster® Pressure Fryer so records may be updated.

If you are a new owner of a used unit or have relocated your Broaster Pressure Fryer, please take a minute to notify us by completing the Pre-Owned Equipment Registration page on our website. It is NOT a warranty registration.

[broaster.com/preowned-registration.htm](http://broaster.com/preowned-registration.htm)

This information enables the Broaster Company to better serve you and keep you informed of changes in equipment, condiments, or service bulletins.



## 3 – INSTALLATION INSPECTION

Before operating unit, be sure installation meets all requirements in the Installation Manual provided with your unit.

**⚠ CAUTION** Follow cleaning instructions as outlined in this manual before operating for the first time. See “Cleaning” on page 9-1.

- A remote circuit breaker or fuse should be installed in the main power supply located in a path of exit and clearly identified.
- To avoid splashing of hot liquid, unit must be restrained to prevent tipping. This can be done by installing the unit in a battery of appliances, in an alcove or with adequate ties.
- See **Safety Relief Valve** on page 4-3. DO NOT install unit where traffic areas are on either side or behind unit.

### 2400GH:

**⚠ WARNING** Electrical Grounding Instructions—The Model 2400GH is equipped with a three-prong (grounding) plug to protect against shock hazard. The plug must be plugged directly into a properly grounded three-prong receptacle. **DO NOT** cut or remove the grounding prong from this plug.

- A gas shutoff valve, installed in gas supply line, should be located in a path of exit and clearly identified.

### **Gas Conversion** USA and Canada


- Contact your local Broaster Company representative for converting from one type of gas to another.

### European Union

- Units manufactured for use in the European Union are not convertible from one type of gas to another.



## 4 – GETTING TO KNOW YOUR BROASTER® PRESSURE FRYER

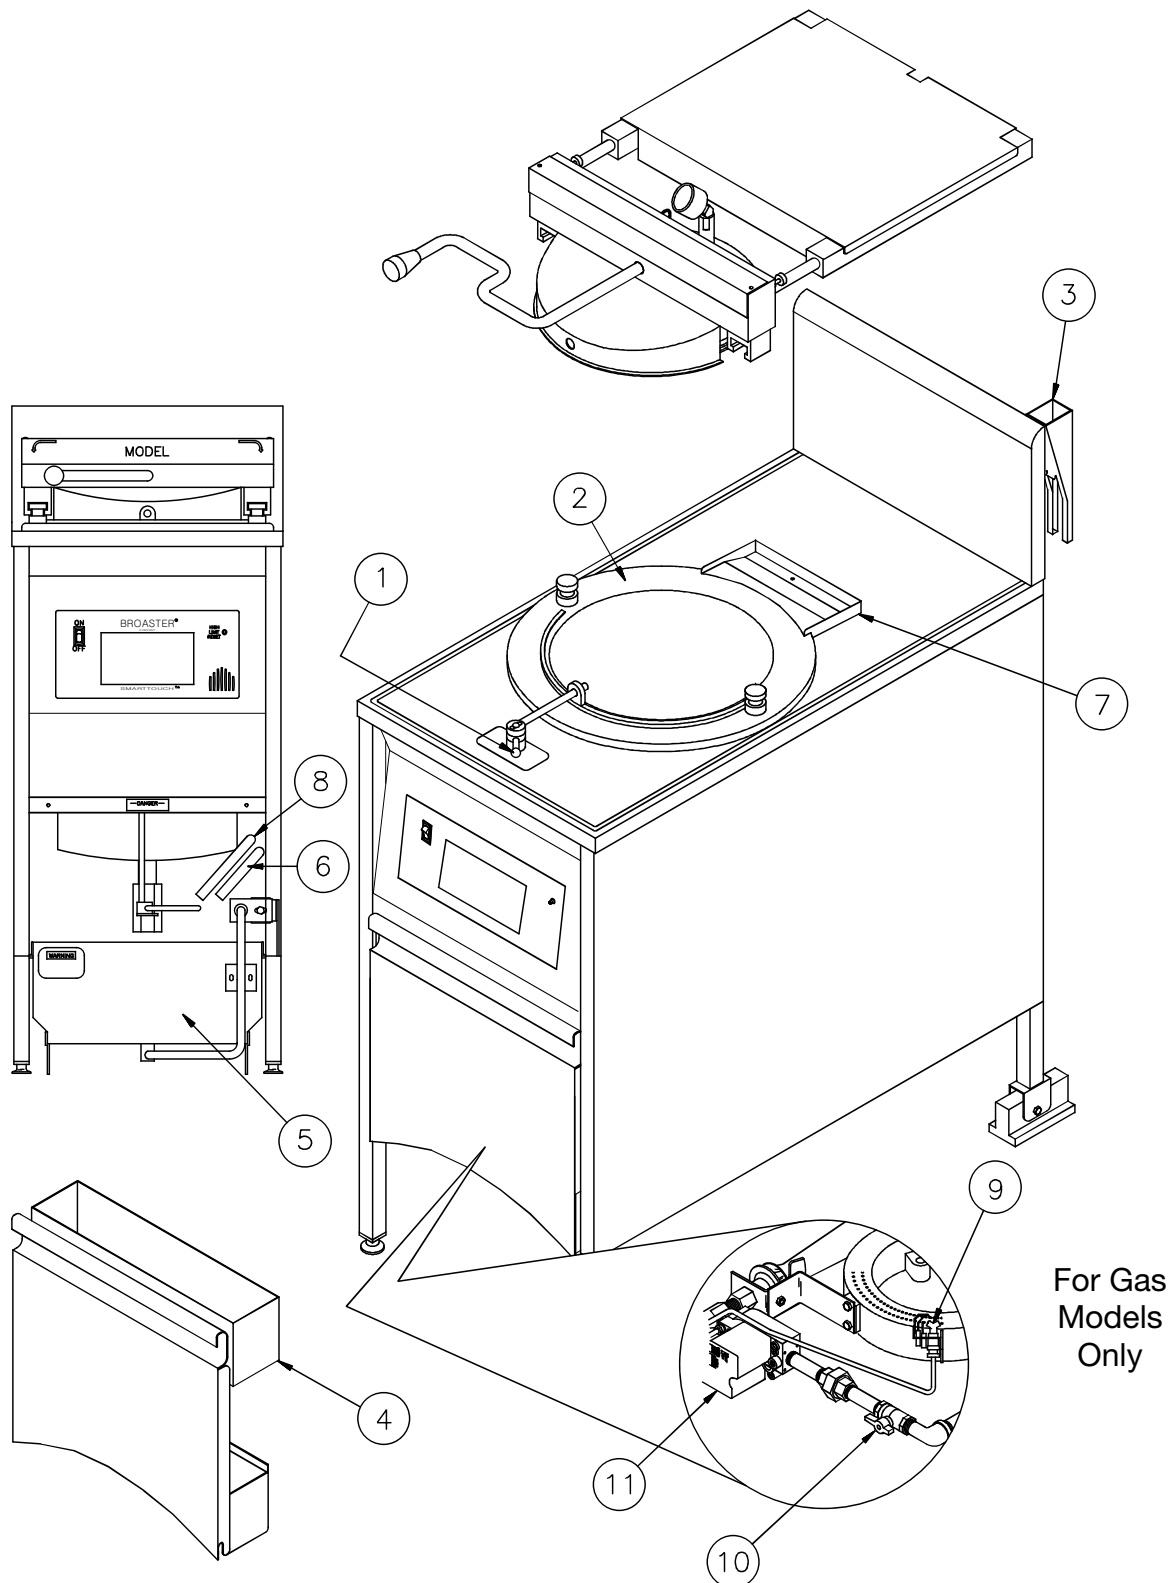

1. **Pressure Regulating Valve:** Opens and closes pressure regulating valve. When cover and valve are CLOSED, this valve seals the cooking well, allowing pressure to build. Valve is preset to maintain pressure at 12-14 PSI during a cooking cycle. When OPEN, all pressure is exhausted and timer stops timing.
2. **Cooking Well:** Holds cooking oil.
3. **Basket Lifter Holder:** Holds basket lifter when not in use.
4. **Condensate Pan:** Holds condensation drained from exhaust tank. Check liquid level several times daily. Empty as needed.

**⚠ WARNING** Water and hot oil **DO NOT** mix. **DO NOT** pour contents of condensate pan into cooking well or filter pan. Hot oil could splash, causing serious burns.


5. **Filter Pan:** Holds filter components and filtering compound used to filter hot oil.

**⚠ CAUTION** HOT Surfaces!

**⚠ WARNING** Hot shortening! **DO NOT** use this container to transport hot shortening. Hot shortening could splash, causing serious burns.

6. **Exhaust Drain Tube:** Directs condensation from the exhaust tank into condensate pan.
7. **Countertop Drip Pan:** Collects condensate from the open cooking well and directs it to the Drip Pan Drain Line. Drip Pan is removable for cleaning.
8. **Drip Pan Drain Line:** Directs countertop liquid toward Condensate Pan.


9. **Pilot Burner:** A small flame used to ignite the main burner.
10. **Manual Gas Shut Off Valve:** Shuts off gas flow to the gas valve. Gas will flow when handle is in line with pipe. Turning handle crosswise to the pipe stops gas flow.
11. **Gas Valve:** Regulates gas supply. The valve has a two-position switch: OFF stops all gas flow and ON allows gas flow to pilot and main burner as needed.

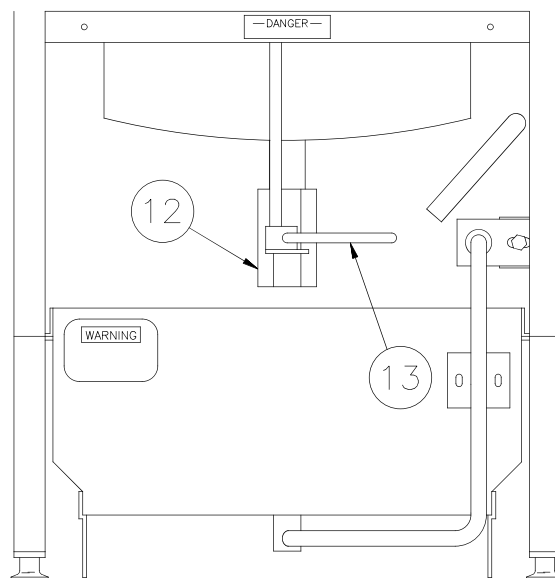

12. **Drain Valve:** Used to drain cooking oil from cooking well into filter pan or container made for handling hot oil.

**⚠ DANGER** Never drain oil unless power switch is OFF and pressure regulating valve is OPEN. Hot oil could spray out under pressure, causing serious burns.

13. **Drain Valve Handle:** Opens and closes drain valve. When handle is horizontal, valve is closed. When vertical, valve is open.

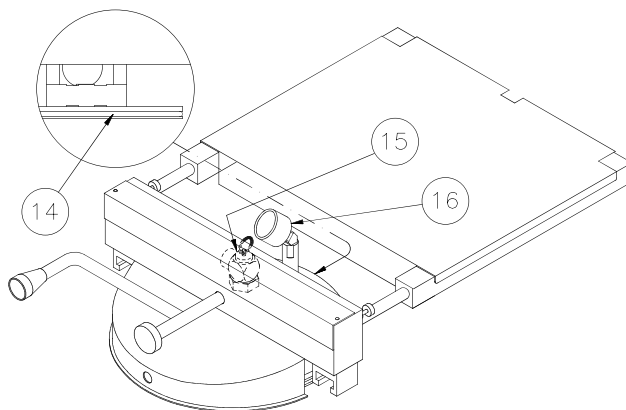


14. **Cover O-Ring:** Forms a seal when cover is lowered into the cooking well.
15. **Safety Relief Valve:** This valve will open in the event pressure in the cooking well meets relief pressure of valve. A properly installed valve has the outlet facing toward rear corner of the countertop. DO NOT use valve to release pressure at the end of a cooking cycle. If valve leaks during normal operation, DO NOT operate the unit until valve is replaced by an authorized Broaster Company representative.

**⚠ WARNING** Keep away from safety relief valve opening unless wearing heat and steam protective apparel. Escaping steam could cause serious burns.


**NOTICE** Test valve once a month. Also test before and after an extended shutdown. Using a hot mitt, lift valve handle during a cook cycle until pressure is released from cooking well. Allow valve to snap closed.

16. **Pressure Gauge:** Indicates pressure within the cooking well. Normal operating pressure is 12-14 PSI.

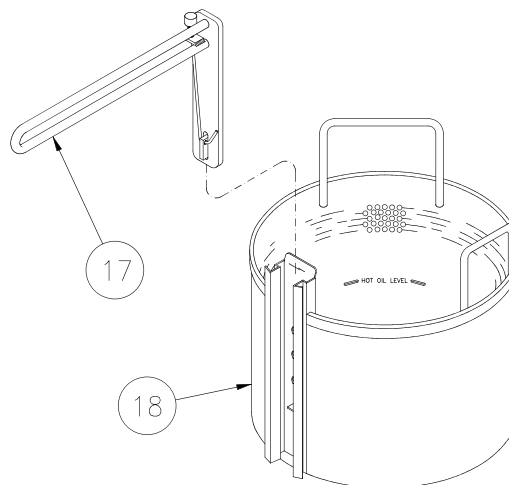

17. **Basket Lifter:** Used to raise and lower food basket into the cooking well.
18. **Food Basket:** Holds product for cooking. Indicates proper level of oil at operating temperature.


**⚠ WARNING** Basket, lifting handle and basket support grate are hot, use gloves when handling. Hot surfaces could cause serious burns.

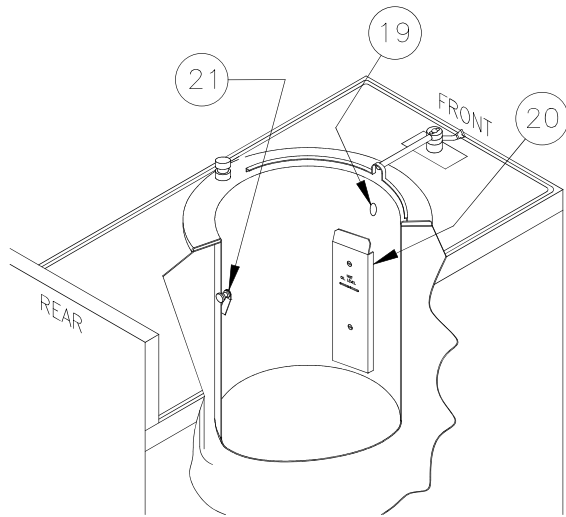

19. **Pressure Port:** When cover is CLOSED while cooking, all steam passes through this port into the pressure regulating valve.
20. **Capillary Guard:** Protects temperature sensor probe, hi-limit bulb and capillary from damage. Includes hot and cold oil level indicator.
21. **Basket Rest:** Holds and tilts basket for draining when removing cooked product from oil or loading uncooked product.



**Check oil level before turning power switch to ON.**

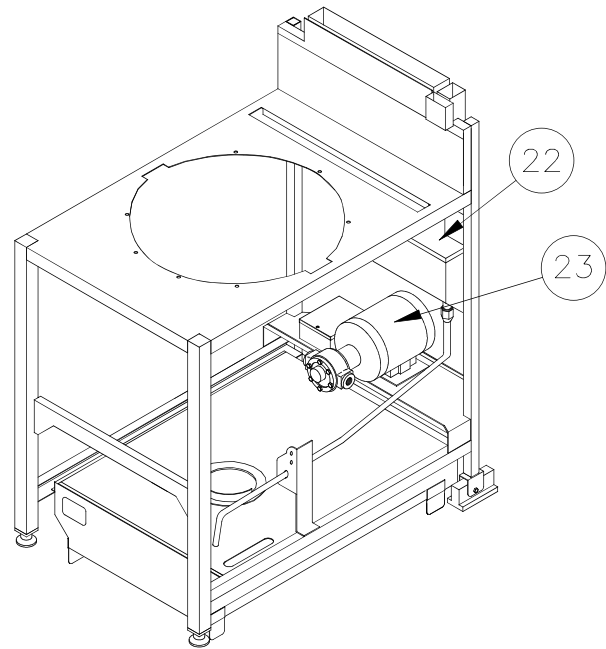

22. **Exhaust Tank:** Steam and vapors are exhausted through this tank.
23. **Filter Pump and Motor:** When filtering, returns oil to cooking well.



**DO NOT rest basket on top flange of cooking well. Damage to area in contact with O-ring can cause leaking under pressure or O-ring failure.**



## 5 – PRE-COOKING PREPARATIONS

### O-RING LUBRICATION

Lubricate filter pan riser line O-ring and cover O-ring with cooking oil (see COVER steps 1 through 3, page 9-2).

### COVER CHECK

To OPEN cover, push down on cover handle then rotate handle clockwise. Slide assembly to the rear of the unit. To CLOSE, pull assembly toward the front and rotate handle counterclockwise.

- Always fully rotate handle OPEN or CLOSED.
- Never use force to OPEN cover. OPEN only when no pressure is present in the cooking well.
- If cover will not OPEN easily, be sure pressure regulating valve is OPEN. If cover will still not OPEN, turn cook/filter switch OFF. DO NOT operate unit until it has been serviced by an authorized Broaster Company representative.
- When cover has been placed in its raised position, it should remain raised until it is deliberately lowered. If the cover will not remain raised, turn cook/filter switch OFF. DO NOT operate unit until it has been serviced by an authorized Broaster Company representative.

### COOKING OIL

The words “oil” and “shortening” are used to describe a high quality cooking medium manufactured for deep frying.



Check oil level before turning power switch to ON.



Danger of fire exists if the oil level is below the minimum level.



Using old oil reduces flash-point, increasing the risk of surge boiling.



Use care when handling hot oil. Oil could splash, causing serious burns.

Fill cooking well using one of the following methods:

#### Liquid Oil

Use Broaster® liquid oils or a high quality liquid oil manufactured for deep frying.

#### Solid Shortening

(Any cooking medium that is solid at room temperature)





**DO NOT** heat solid shortening on a stove or other appliance prior to placing in cooking well. Hot shortening could splash, causing serious burns.

**DO NOT** leave unit unattended when melting solid shortening. **HOT OIL LEVEL** must be maintained. Solid shortening must be soft enough to be packed around and completely cover heating elements on the 2400E and sides and bottom of cooking well on the 2400GH. If not, there will be places on heating elements and cooking well not covered with shortening. During the heating period, these bare spots will be hot spots. They could discolor the cooking well, damage a heating element, scorch or burn shortening, reducing its useful life.

## OIL LEVEL

Close drain valve. Fill cooking well with oil to COLD OIL LEVEL. Oil will expand when heated.

**⚠ WARNING** Be sure hot oil is at **HOT OIL LEVEL**. Be sure top heating element is covered before turning power switch to **ON**.

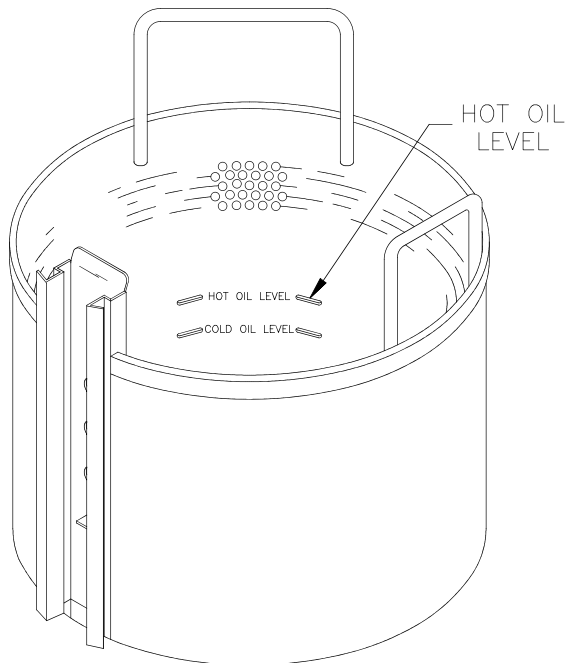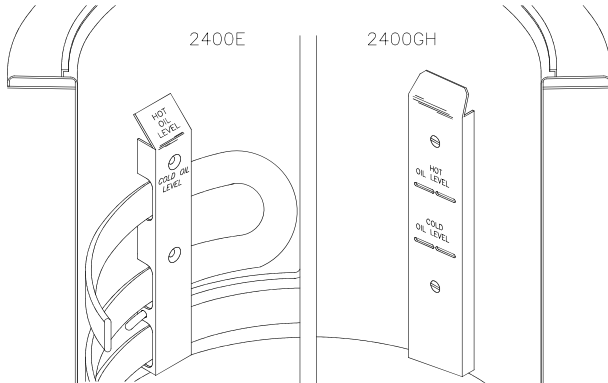


## FOOD AND CONDIMENTS

Make sure the food you purchase is high quality. For best results, chicken should be fresh, trimmed for portion control, and uniform in size.

A wide variety of Broaster® Company monosodium glutamate-free condiments are available. They have all been tested for the best possible results in the unit. If using Genuine Broaster® breading and marinades, you can obtain a Trademark Authorization allowing the use of the Broaster Company trademarks in your advertising and menus.

## 2400GH LIGHTING INSTRUCTIONS

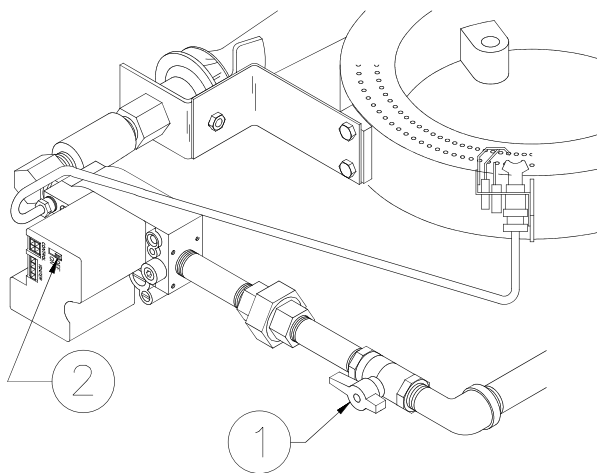

### Start Up

1. Turn power switch OFF.
2. See OIL LEVEL.
3. Turn gas shut-off valve (1) ON. Wait five minutes before turning gas control ON.
4. Slide switch (2) on top of gas control to ON.\*



**The model 2400GH has an intermittent pilot burner. This type of pilot lights when the controller calls for heat and goes out when the controller is not calling for heat.**

To light pilot and main burners, turn power switch to ON.

### Shut Down


1. Turn power switch OFF.
2. Turn gas control switch (2) OFF.
3. Turn gas shut-off valve (1) OFF.

\*.



## 6 - SMART TOUCH CONTROL PANEL

### SMART TOUCH FAMILIARIZATION

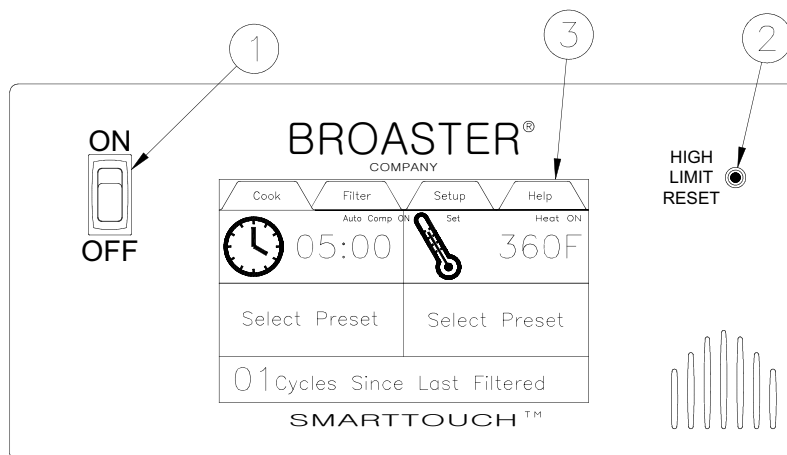

1. **Power Switch:** This switch has two positions: ON or OFF.

2. **Hi-Limit Control:** Prevents oil temperature from exceeding 475°F. When this control trips, the power to the unit will be shut down. Turn unit OFF and DO NOT attempt to operate until it has been serviced by an authorized Broaster Company representative.

#### NOTICE

**It is possible for this control to trip during shipment. If it does, fully depress red reset button. If control “clicks” it was tripped. If not, it is correctly reset.**

3. **Touch Control Screen:** Touching this screen controls the many options of the fryer.

On initial power up you may be asked to enter the current date and time, and verify the Serial Number. Or the screen will have the word CAUTION flashing on the screen.

If the date and time entry screen appears press the box after “Month” and a keypad will appear. Enter the number of the month

and press the enter key. Repeat this action for the Day, Year, Hours, Minutes, Seconds, AM and PM boxes. When finished press the green OK button in the bottom right corner of the screen. The next display will ask you if this date should be used to establish the warranty start date. Press the green OK button.

You will then see a display asking you to verify the serial number of your fryer. Enter the serial number using the keyboard and press enter.



#### NOTICE

**The date/time display and the serial number display will not appear again when the power switch is turned off and back on.**

If the CAUTION screen appears it is there to remind you to check the oil level before the heating elements or burner are activated. If the oil is at the proper level, press the green OK button in the bottom right corner of the screen.


Along the top of the screen are four tabs (Cook, Filter, Setup and Help) to help you setup and use your fryer.

## COOK TAB

Cook	Filter	Setup	Help
 05:00	Auto Comp ON	 Set	Heat ON 360F
Select Preset		Select Preset	
01 Cycles Since Last Filtered			

This tab is the main working screen. From this screen you can set the Cook Cycle Time, Cook Temperature or select a Product Preset.

### CookTime Display:

	Auto Comp ON
05:00	

The cook time is indicated in the box next to the clock face. To change the time press the time display twice and a keypad will appear.

Enter the cook time for the product you are cooking, as you enter the time it will appear above the keypad. To save this time press the enter key the new time will be entered and the keypad will disappear.

If no entry is made or the enter key is not pressed within 25 seconds, no change is made to the time.

When a cooking cycle is started the box below the cook time turns yellow and shows the amount of time remaining in the cycle. The right box displays "CUSTOM". The word "CUSTOM" also replaces the tabs across the top of the display. "CUSTOM" indicates you are in manual cooking mode.

At the end of the cycle the left box alternates between red and white, the alert sounds and continues until the exhaust valve is opened by turning the small handle on the countertop from "CLOSED" to "OPEN".


### Auto Comp

In the upper right corner of the cook time display is the Auto Comp indicator. It will be black if Auto Comp is off and green if Auto-Comp is on.

To turn Auto Comp on or off press the cook time display twice. When the keypad appears the Auto Comp toggle switch is in the upper right corner of the keypad. If the button is red Auto Comp is off, if it is green Auto Comp is on. Press the Auto Comp button to change it then press the enter key.

Our recommendation is that Auto Comp should be on when cooking a load of product.

### Temperature Display:

Set	Heat ON
	360F

The temperature is indicated next to the thermometer.

When the fryer is turned on in the morning this box will be yellow and "Heat On" will be displayed. The temperature will alternate between "LOW" and the set temperature until the oil temperature reaches the set temperature.

There are other times when this will occur;

1. Anytime the temperature is changed.
2. After a filtering cycle.
3. When a preset is selected and the oil temperature is not at the preset temperature.

In any of these cases when the oil temperature reaches the set temperature the box turns green indicating the oil is up to the set temperature.

The temperature shown in this box can be either the “Set” temperature or the “Actual” temperature as indicated above the thermometer. To change from one to the other press and hold anywhere in the box for 3 seconds. An alert will sound when you press the box and a second alert will sound when the change is made.

To set the temperature, press the temperature box twice and a keypad will appear. Enter the temperature for the product you want to cook, as you enter the temperature, it will appear above the keypad. To save this temperature press the enter key.



Select Preset

There are 2 “Select Preset” boxes.

All of the Broaster Company Products are preloaded into the memory of the control and can be selected when you want to cook that product. The cook time and cook temperature for that product will be automatically entered in the Time and Temperature displays.

To select a product, press either preset box and a menu of the products will be displayed. Tap the product you wish to select.

If the wrong product comes up, don’t worry! Tap the preset box again and the menu will reappear.

When the item has been selected a picture of the item will appear in the left box and a description of the item will appear in the right box. When a cook cycle is started the left box turns yellow and the time remaining in the cycle is displayed. The picture moves to the right box.

If the menu item to be cooked uses a different temperature the temperature box will either remain green meaning it is all right to start a cook cycle or it will turn yellow meaning the temperature is too low to start a load. Wait to start a cook cycle until the temperature is green.

When the temperature is green. Load the product as recommended and move the small handle on the top of the fryer from open to close. This will start the cycle timer counting down. When the load is done an alert will signal that the cooking cycle is complete.

#### **Cycles Since Last Filtered:**




01 Cycles Since Last Filtered

It is recommended the oil should be filtered every 5 loads.

This box indicates how many cook cycles have been done since the last time the oil was filtered. It is active and can be pressed at any time to go to the filter display except during a cooking cycle. Once you reach a preset number of cycles, you will be shown a filter options screen. If a filter cycle is bypassed the next cycle will turn red and start flashing.

This number can be changed and the procedure will be explained in the Setup Tab section.

## **FILTER TAB**

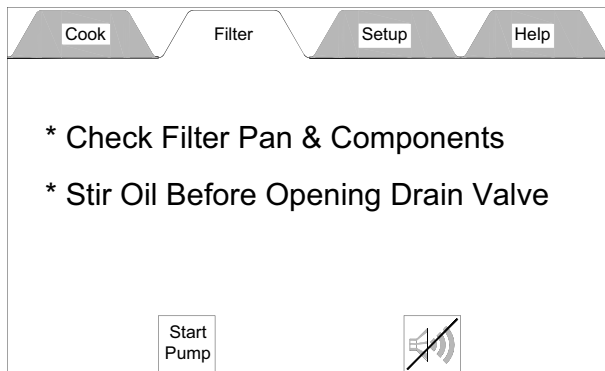


This tab is the filter motor control and has two buttons; a Start Pump button and an Alert Silence button.

There are also two reminders to observe before filtering the oil. SEE SECTION 9 - COOKING OIL CARE AND FILTERING before starting the pump motor.

When the Start Pump button is pressed the filter running display appears as shown below.



The timer in the middle of the screen starts counting up. When it reaches 5:00 minutes an alert sounds and a reminder flashes (see below) to close the drain valve. To silence the alert press the button with the speaker on it. DO NOT press the Stop Pump button.

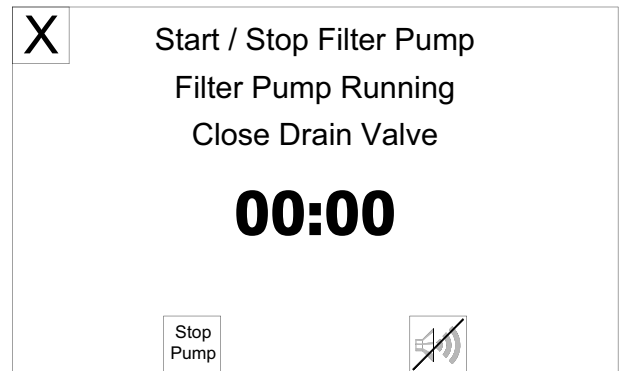

Press STOP PUMP after the oil is completely returned to the cooking well or you can leave the pump running and it will automatically stop when the counter says 10:00 minutes. See display below.



To return to the Cook Tab, press the red X in the upper left corner. The Caution Display will appear advising the oil level be checked. If the oil level is OK press the green OK button.



# SETUP TAB

This tab may or may not be secured. If it is unsecured the Pin Disabled display will appear as shown below. Press the OK button to continue.

CookFilterSetupHelp

PIN disabled  
Press OK

\*\*\*\*\*

OK

If this tab is secured the Enter Pin display will appear as shown below.

CookFilterSetupHelp

Enter PIN

\*\*\*\*\*

If the Pin number is known, press the box and a keypad will appear. Enter the PIN number and press Enter.

CookFilterSetupHelp

Time & Date Adjustment

Temperature

Energy Save Setting

Pin Maintenance

Presets

Shortening Management

Language Selection

Alert Settings

Exit Setup

## Time & Date Adjustment:

Pressing this option opens the Set Date & Time display.

X

Set Date & Time

Month

Day

Year

Hours

Minutes

Seconds

AM

PM

OK

To set the date and time, press the box after “Month” and a keypad will appear. Enter the number of the month and press the enter key. Repeat this action for the Day, Year, Hours, Minutes, Seconds, AM and PM boxes. When finished press the green OK button. To leave this display without making a change press the red X or the green OK.

## Temperature:

Pressing this option opens the Temperature Settings Display.

The only thing that can be set in this display is the temperature scale, either Degrees F (fahrenheit) or Degrees C (Celsius).

X

Temperature Settings

Temperature Units: 

Degrees F

OK

Pressing the Degrees box switches the units. Then press OK.

## **Energy Save Setting:**

Pressing this option opens the Energy Saving Settings display.

X

Energy Saving Settings

Set Energy Save Timer (HH:MM):

00:00

Set Auto Shut Off Timer (HH:MM):

00:00

(Setting Either Timer to 00:00 will disable the function)

OK

You have two options on this display:

### **OPTION 1: Energy Saving Option.**

The fryer will go into this mode when the specified idle time has passed. When the fryer goes into the energy saving mode the oil temperature will drop to 270° F (132° C) and remain there until the fryer is prompted by pressing the green OK button, to resume the normal cooking temperature. When the fryer enters the energy saving mode the display shown below appears.

Energy Save Mode

Set temperature is 270F

Allow temperature to recover  
before cooking

OK

When the OK button is pressed the display returns to the normal Cook Tab display and the temperature will be yellow and, Low and the set temp will be alternating. **DO NOT** start cooking until the temp display is green.

### **Option 2: Auto Shut Off Timer.**

When this option is set, the control will shut off all heaters, and the display shown below will appear.

Heat Off

due to inactivity

Hit "OK" to resume and allow  
temperature to recover  
before cooking

OK

Follow the instructions on the screen to resume use of the fryer.

## **Pin Maintenance:**

Pressing this option opens the Pin Maintenance display.

X

PIN Maintenance

Pin

\*\*\*\*

Pin On/Off


OFF

OK


## **Presets:**

Pressing this option opens a list of products with a picture of the product and the cook time and cook temperature pre-loaded.

This is where the product preset is either shown or not shown as a preset on the Cook Tab.

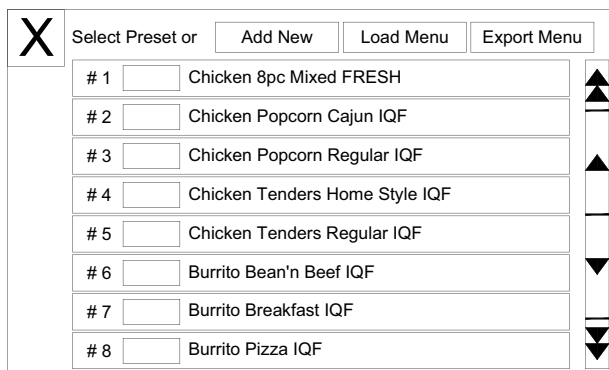

By default all products will be shown. To turn any product off, press the item once and the Edit/Create Preset display will appear.

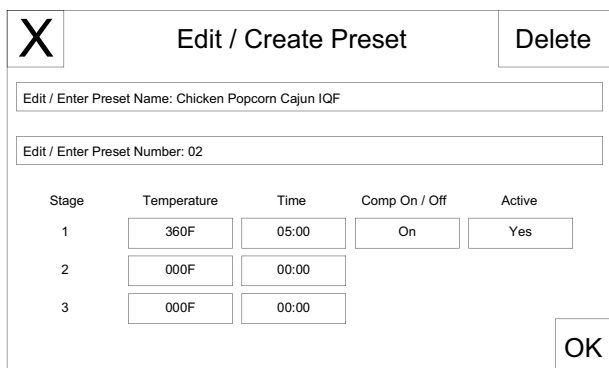

Stage	Temperature	Time	Comp On / Off	Active
1	360F	05:00	On	Yes
2	000F	00:00		
3	000F	00:00		

Here you can edit the name of the of the product, change its position on the list, set the cook time and temperature, set Auto Comp to be on or off during the cooking cycle and whether or not this item should be active as a preset on the Cook Tab.

Creating a new product or deleting a product on the list will be described later.

## **Name Edit:**

To edit the name of the current product press the Edit / Enter Preset Name bar and a typewriter keyboard will appear. The cursor will be at the end of the name. To change the name press the BACK button and the cursor will delete the name one letter each time the BACK button is pressed.

Delete the letters until you get to the place where you want to start making the change. To get the numbers and symbols to come up press the Symbol key.

When you have completed entering the changed name press the ENTER key.

## **Position Edit:**

To change the position of this item on the menu list, press the Edit / Enter Preset Number bar and a number pad will appear. Enter the number of the position you want this item to appear at then press the ENTER key.

## **Time & Temperature Edit:**

Most of the cooking will be done on stage 1. To edit this feature press the button and a number pad will appear. Enter the desired cooking temperature or time and press the ENTER button. If a number is entered and the ENTRY button is not pressed within 30 seconds the number pad will disappear and no changes will be made.

## **Comp On / Off:**

This button toggles Auto Comp on or off.

## **Active:**

This button allows the item to be shown in the preset menu list of the Cook Tab. If the button says Yes the item appears on the list if No it does not.

You can quickly tell when a product is not active because the name and number of the item will be greyed out.

### **ADD NEW:**

Pressing this button opens a display to enter a new product to the menu list. This display is similar to the Edit display except all information must be added.

Stage	Temperature	Time	Comp On / Off	Active
1	000F	00:00	On	Yes
2	000F	00:00		
3	000F	00:00		

To enter the name press the Edit / Enter Preset Name bar and enter the name of the new product.

The Preset Number automatically defaults to the next number after the last item on the list. This can be changed by pressing the Edit / Enter Preset Number bar and entering the number where you want this item to appear.

Set the cook temperature and cook time the same way as when editing a preset.

Set Auto Comp and Activity accordingly.

Press the green OK button to save the new product.

### **Menu Transfer:**

The Smart Touch control allows a revised menu to be transported from one fryer to other fryers which also have a Smart Touch control. This is done from the Preset tab using the Load Menu and Export Menu buttons along the top of the display.

Select Preset or	Add New	Load Menu	Export Menu
# 1		Chicken 8pc Mixed FRESH	
# 2		Chicken Popcorn Cajun IQF	
# 3		Chicken Popcorn Regular IQF	
# 4		Chicken Tenders Home Style IQF	
# 5		Chicken Tenders Regular IQF	
# 6		Burrito Bean'n Beef IQF	
# 7		Burrito Breakfast IQF	
# 8		Burrito Pizza IQF	

### **EXPORT MENU:**

When you make changes to the menu on one fryer and want to put the same menu on other fryers with the Smart Touch Control you can export the revised menu from this fryer to the Flash Drive and load it onto the other fryers.

Plug the flash drive into the USB port in the front panel above the control panel. Press the Export Menu button on the Preset menu display.

Press the Export Menu button once and the control will ask you for a filename. Press the Enter Menu File Name bar and a keyboard will appear. Enter a name you will recognize then press the ENTER Button.

#### **NOTICE**

The file name can only be 8 characters long.

When the ENTER key is pressed a box will appear that says Exporting Menu... with a progress bar.

When the export is complete the box will say "Menu Exported". Press the OK button and the Preset display will appear. Remove the flash drive from the USB port.

### **LOAD MENU:**

Menu changes that have been downloaded to a Flash Drive can be loaded onto another fryer with Smart Touch control.

Plug the flash drive into the USB port in the front panel above the control panel. Press the Load Menu button on the Preset menu display.


When the display appears there may be more than one menu. Press the bar for the menu you want loaded and a “Loading Menu...” box will appear with a progress bar.

When the menu is loaded a box will appear saying “Menu Loaded”. Press the OK button and the Preset display will appear.

Remove the flash drive from the USB port.

### **SHORTENING MANAGEMENT:**

Pressing this option opens the Shortening Management Display.

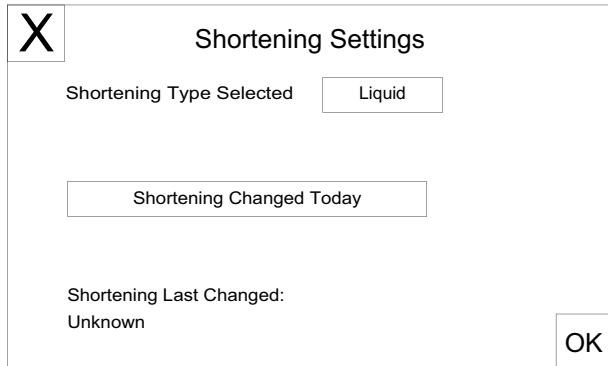The screen is titled "Shortening Settings" with a close button (X) in the top left. It contains a "Shortening Type Selected" section with a button labeled "Liquid". Below this is a button labeled "Shortening Changed Today". At the bottom, it says "Shortening Last Changed: Unknown" and has an "OK" button in the bottom right corner.

X Shortening Settings

Shortening Type Selected Liquid

Shortening Changed Today

Shortening Last Changed: Unknown OK

Pressing the button next to Shorting Type toggles between “Liquid” and “Solid”.


Pressing the “Shortening Changed Today” bar enters today’s date and time as a reminder when the oil was last changed. this also resets the “Cycles Since Last Filterd” counter to 00 on the Cook Tab.

### **LANGUAGE SELECTION:**

Pressing this option will allow you to change the language used in all displays. (This option is not yet active)

### **ALERT SETTINGS:**

Pressing this option allows you to set conditions for several features.

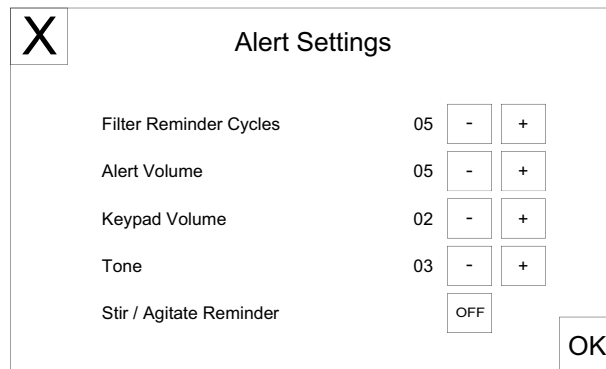The screen is titled "Alert Settings" with a close button (X) in the top left. It lists five settings: "Filter Reminder Cycles" (05), "Alert Volume" (05), "Keypad Volume" (02), "Tone" (03), and "Stir / Agitate Reminder" (OFF). Each setting has minus and plus buttons next to its value. An "OK" button is in the bottom right corner.

X Alert Settings

Filter Reminder Cycles	05	-	+
Alert Volume	05	-	+
Keypad Volume	02	-	+
Tone	03	-	+
Stir / Agitate Reminder	OFF		

OK

The numbers left of the boxes indicate the current setting. They can be changed by pressing the “-” or “+” buttons.

**Filter Reminder Cycles:** This sets the number of cook cycles between each oil filter cycle. The Broaster Company recommends

5 cook cycles however, you can set it as you desire.

**Alert Volume:** This should be set loud enough to be able to hear it above any other noises in the kitchen.

**Keypad Volume:** It should be loud enough to hear while making changes in front of the fryer or when operating the fryer.

**Tone:** There are a range of tones from low to very high. Chose the one that suits your operation.


Stir/Agitate Reminder: This alert appears when 3 conditions occur.

1. When the fryer is first turned on in the morning, this reminder will appear after the oil comes up to the set temperature.
2. After a filter cycle has been completed this reminder will appear after the oil comes up to the set temperature.
3. If the fryer has been sitting idle for 2 hours or longer this reminder will appear will alert you to stir the oil to get it to a uniform temperature.

After making the adjustments on this display press the green OK button to save the entries.

To go back to the Cook display either press the “Exit Setup” button or the “Cook” Tab.

## **HELP TAB**

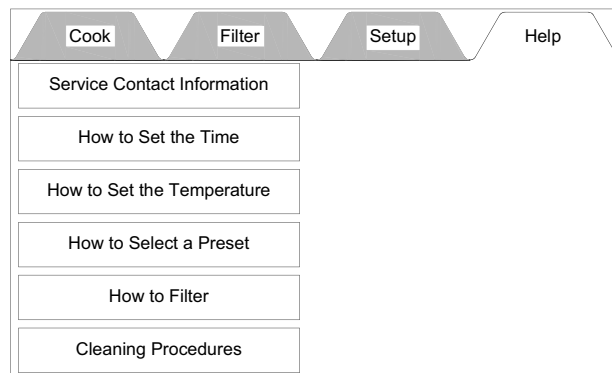

This display provides instructions for the items in the boxes. They are available at any time to help you set up the control to cook product.

## 7 – COOKING WEIGHT, TEMPERATURE AND TIME

### FRESH PRODUCTS

**⚠ WARNING** ALWAYS COOK  
BROASTER FOODS  
UNTIL THE INTERNAL TEMPERATURE  
REACHES THE FOLLOWING MINIMUMS:

**Chicken, White: 170°F;**  
**Chicken, Dark: 180°F;**  
**Corn Dogs/Pork: 160 to 170°F;**  
**Fish: 155°F**

The charts below give suggested temperature and time settings. Actual cook times may vary depending on a product's internal temperature before cooking. Times indicated below assume AutoComp is ON.

#### NOTICE

Increase cook time when cooking frozen or oversized product.

Use our methods of food preparation and cooking procedures for the best possible results.

#### MAXIMUM LOAD

Fresh bone-in chicken:  
9.6 kg (21 lb)

#### ⚠ WARNING

Placing more than the recommended weight of fresh product or product that is over-wet in the cooking basket will increase the amount of surge boiling in the cooking well.

PRODUCT	WEIGHT/THICKNESS	TEMPERATURE	TIME
Fresh Chicken 8 or 9 Piece Cut	0.90 - 1.02 kg (2.00 - 2.25 lb)	182° C (360° F)	7:15 - 7:45 minutes
	1.02 - 1.13 kg (2.25 - 2.50 lb)	182° C (360° F)	7:45 - 8:15 minutes
	1.13 - 1.25 kg (2.50 - 2.75 lb.)	182° C (360° F)	8:15 - 9:00 minutes
	1.25 - 1.36 kg (2.75 - 3.00 lb)	182° C (360° F)	9:00 - 9:30 minutes
	1.36 - 1.47 kg (3.00 - 3.25 lb)	182° C (360° F)	9:30 - 10:00 minutes
	1.47 - 1.59 kg (3.25 - 3.50 lb)	182° C (360° F)	10:00 - 10:30 minutes
Whole Chicken	1.02 - 1.13 kg (2.25 - 2.50 lb)	182° C (360° F)	12:00 - 13:00 minutes
Potatoes	Quartered	182° C (360° F)	7:00 - 8:00 minutes
Pork Ribs	0.90 kgs (2.00 lb) and under	182° C (360° F)	6:00 - 7:00 minutes
Pork Chops	19.05 mm (3/4 inch) thick	182° C (360° F)	5:00 minutes
Liver	6.35 mm (1/4 inch) thick	182° C (360° F)	1 1/2 minutes
Fish	0.09 kg (3 oz) Filets	182° C (360° F)	3:00 - 4:00 minutes
Onion Rings	9.53 - 12.70 mm (3/8 - 1/2 inch) thick	182° C (360° F)	2:00 - 3:00 minutes

## INDIVIDUALLY QUICK FROZEN (IQF) CHICKEN, FROZEN

Keep uncooked product frozen at 0°F or below at all times.



**ALWAYS COOK ALL  
BROASTER FOODS**

**UNTIL THE INTERNAL TEMPERATURE  
REACHES THE FOLLOWING MINIMUMS:**

### Maximum Load Size:

6 chickens (48 pieces)

Chicken, White: 170°F;  
Chicken, Dark: 180°F;  
Corn Dogs/Pork: 160 to 170°F;  
Fish: 155°F

PRODUCT	MAXIMUM LOAD	TEMPERATURE	TIME
Thighs	30 pieces	168° C (335° F)	15:00 - 17:00 min.
Legs	48 pieces	168° C (335° F)	15:00 - 17:00 min.
Breasts	24 pieces	168° C (335° F)	17:00 - 19:00 min.
Wings	60 pieces	168° C (335° F)	12:00 - 14:00 min.
Mixed Load	48 pieces	168° C (335° F)	17:00 - 19:00 min.



# BROASTER FOODS COOKING CHART FOR 2400 PRESSURE FRYER

All cook times are approximate and will vary depending on load size, etc.

Product Description	Package Description	Product Number	Lbs/ Case	Cooking Time	Cooking Temperature	Approx. Load - Kgs (Lbs.) MIN MAX	
Jumbo Popcorn Chicken	2/5# bags	96262	10	4 - 4.5 Min.	182°C (360°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Cajun Jumbo Popcorn Chicken	2/5# bags	96277	10	4 - 4.5 Min.	182°C (360°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Chicken Tenders	2/5# bags	96641	10	5 - 6 Min.	182°C (360°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Zesty Home Style Chicken Tenders	2/5# bags	96349	10	5 - 6 Min.	182°C (360°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Chicken Fillets	2/5# bags	96638	10	6 - 7 Min.	182°C (360°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Traditional Wings	2/5# bags	96261	10	8 - 10 Min.	182°C (360°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Hot 'N Spicy Wings	4/5# bags	96639	20	8 - 10 Min.	182°C (360°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Boneless Buffalo Wings	2/5# bags	96318	10	5 - 6 Min.	182°C (360°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Fully-Cooked Oven Roasted Chicken Wings	2/5# bags	96351	10	6 - 7 Min.	182°C (360°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Chicken Gizzards	Bulk Packed	96271	10	4 - 6 Min.	182°C (360°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Jumbo Corn Dogs	Bulk Packed	96661	10	Thawed 6 - 7 Min.	182°C (360°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Jumbo Corn Dogs	Bulk Packed	96661	10	Thawed 7 - 8 Min.	168°C (335°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Jumbo Corn Dogs	Bulk Packed	96661	10	Frozen 13 - 14 Min.	168°C (335°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Pork Tenderloin	Bulk Packed	96313	9.75	3 - 3.5 Min.	182°C (360°F)	.91 kg (2 lb.)	1.81 kg (4 lbs)
Deluxe Pizza Burritos	48 in 7 trays	96316	15	6.5 - 7.5 Min.	182°C (360°F)	.91 kg (2 lb.)	1.81 kg (4 lbs)
Deluxe Beef 'n Bean Burritos	48 in 7 trays	96317	15	5.5 - 6.5 Min.	182°C (360°F)	.91 kg (2 lb.)	1.81 kg (4 lbs)
Deluxe Breakfast Burritos	48 in 7 trays	96323	15	6.5 - 7.5 Min.	182°C (360°F)	.91 kg (2 lb.)	1.81 kg (4 lbs)
Catfish Tender Strips	Bulk Packed	96340	10	3.5 - 4 Min.	182°C (360°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Hand-Breaded Style Catfish Fillets	Bulk Packed	96354	10	4 - 5 Min.	182°C (360°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Premium Cod Fillets (2 oz. Natural Cut)	2/5# bags	96329	10	4 - 5 Min.	182°C (360°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Premium Cod Fillets (4 oz. Natural Cut)	2/5# bags	96295	10	5 - 6 Min.	182°C (360°F)	.91 kg (2 lb.)	5.44 kg (12 lbs)
Premium Beer-Battered Recipe Shrimp (tail-off)	Bulk Packed	96286	8	2.5 - 3 Min.	182°C (360°F)	.91 kg (2 lb.)	4.54 kg (10 lbs)
Potato Wedges	6/5# bags	96698	30	4 - 4.5 Min.	182°C (360°F)	.91 kg (2 lb.)	4.54 kg (10 lbs)
Potato Slices	6/5# bags	96258	30	3 - 3.5 Min.	182°C (360°F)	.91 kg (2 lb.)	4.54 kg (10 lbs)
Italian-Style 3-Cheese Mozzarella Sticks	4/3# bags	96279	12	1¼ - 1½ Min.	182°C (360°F)	.91 kg (2 lb.)	4.54 kg (10 lbs)
Beer Battered Onion Rings	20/8 oz. bags	96287	10	1¼ - 1½ Min.	182°C (360°F)	.91 kg (2 lb.)	4.54 kg (10 lbs)
Natural Cheddar Nuggets	Bulk Packed	96324	7	1¼ - 1½ Min.	182°C (360°F)	.91 kg (2 lb.)	4.54 kg (10 lbs)
Jalapeno Peppers	4/3# bags	96325	12	1¼ - 2¼ Min.	182°C (360°F)	.91 kg (2 lb.)	4.54 kg (10 lbs)

ALWAYS COOK ALL BROASTER FOODS UNTIL THE INTERNAL TEMPERATURE REACHES THE FOLLOWING MINIMUMS: Chicken, White - 170°F; Chicken, Dark - 180°F; Corn Dogs/Pork - 160°F to 170°F; Fish - 155°F



## 8 – COOKING OIL CARE AND FILTERING

### OIL CARE

#### IMPORTANT

- Store cooking oil at room temperature: 65° - 75° F.
- Do not reuse the oil container.
- Keep oil away from heat and flames.
- Do not store oil near oxidizing agents.



**Use care when handling hot oil. Oil could splash causing serious burns.**

Maximum oil life depends on proper care. See FILTERING and CLEANING. It is very important if the finished product is to be presentable and edible. Useful oil life can be affected by many things:

**Oil Quality:** Poor quality oil will require replacement more often.

**Temperature:** Lowering oil temperature setting during slow periods or between business rushes will extend useful oil life.

**Volume:** The more product cooked, the more often oil will need filtering and replacing.

**Type of Coating and Seasoning Used:** Ingredients in some coatings can affect product appearance and shorten the useful oil life.

#### Amount of Care and Filtering Oil


**Receives:** DO NOT leave any crumb buildup in oil, on cooking well, or on food basket. See FILTERING. Oil will need replacing more often if improperly maintained. Straining methods only remove crumbs. Using a built-in filter, Broaster® filter paper and Broaster® filtering compounds can increase useful oil life up to 200%.

How can you tell if oil should be replaced? It will show signs of increased smoking or foaming. If not discarded, safety and product quality could be sacrificed.

## FILTERING

Filter oil after cooking approximately 95 lb of product, between rush periods and always at the end of each day. Filter oil at 360°F.

**⚠ WARNING** DO NOT use filter pan to transport hot oil. Hot oil could splash, causing serious burns.

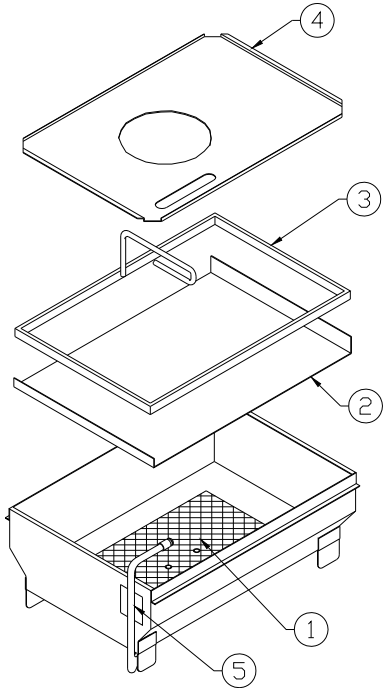

Be sure filter components are assembled correctly. The correct order is (1) Filter Screen on bottom of filter pan, (2) Filter Paper, (3) Filter Hold Down, one cup (1600) or two cups (1800) of Bro-Clean filtering media on top of filter paper, and/or 15 oz. of XL filtering compound to cooking well, and (4) Filter Cover. For best results change paper after each filter cycle.


1. Be sure filter pan, with components, is installed under unit properly. Ensure O-ring is installed on (5) Riser Line and is aligned with suction line. Turn cook/filter switch OFF and OPEN cooking well cover.

**⚠ WARNING** DO NOT open valve while controller is displaying the COOK screen.

2. Using a ramrod, stir oil in a circular motion. This will aid in draining crumbs. Lower cover, pull cover over cooking well and open drain valve slowly. If valve becomes obstructed with crumbs, use ramrod to unblock valve.

**⚠ CAUTION** DO NOT allow ramrod point to hit bottom of filter pan. Point of ramrod can penetrate filter paper, allowing crumbs and filter compound to pass through filter lines.

3. When oil is drained, remove basket support grate, if present, and clean separately. Lower cover assembly and pull cover over cooking well completely but DO NOT CLOSE. Turn cook/filter switch to FILTER. When oil is flowing out of drain, close drain valve and pump approximately 8 inches of oil into cooking well.
4. Being careful of hot oil and cooking well components, use bottom brush to scrub cooking well starting at the top and cleaning downward. On 2400E, clean inside and between heating elements. Use element brush to clean between cooking well and heating elements. Be sure crumbs do not cover temperature sensor. See the following figure for sensor location.

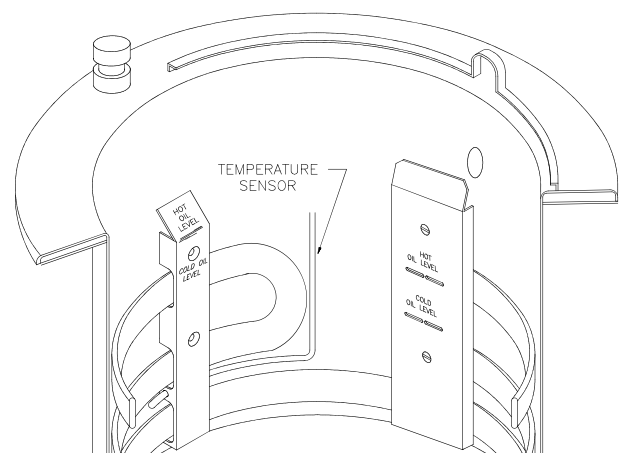

Slowly agitate brush in oil to dislodge any crumbs caught in it. Rinse cooking well using oil remaining in brush when dipped in oil. Drain remaining oil and crumbs. Pull cover over cooking well but **DO NOT CLOSE**. Turn cook/filter switch to FILTER. After 5 minutes, push cover back and raise cover assembly. Close drain valve.

5. When air bubbles appear press STOP PUMP, then press the red X to exit the FILTER TAB. The CHECK OIL LEVEL screen will appear as a reminder to check the oil level in the cooking well.

**⚠ WARNING** Be sure hot oil is at **HOT OIL LEVEL** and top heating element is covered before starting another cooking cycle.

6. When filter pan has cooled, remove and discard filter paper and filtering compound. Using a clean cloth or paper towel, wipe crumbs from filter hold down ring, filter pan interior. Completely clean the filter pan cover. Never use soap and water.

**⚠ WARNING** Rags or paper containing cooking oil can catch fire if exposed to heat. Laundering will not remove the oil. Dispose of all oil-soiled papers and rags in a trash container that is in a ventilated area away from all cooking equipment or other heat sources such as direct sunlight.

**⚠ WARNING** **DO NOT** operate unit without filter pan and filter pan cover in its proper position. Filter pan cover must be wiped clean after each filtering cycle.

7. Return clean filter pan (equipped with all necessary clean filter components including cover) under the fryer before operation.

## **FILTERING HINTS**

---

1. Never allow solid shortening to solidify in filter pan or lines.
2. For maximum filtration, recirculate oil. When hot oil is drained into filter pan, turn cook/filter switch to FILTER. Let motor run for five minutes with drain valve open. This may extend useful oil life.

**NOTICE** Ensure filter pump is **OFF** to avoid splashing of oil if motor protector reset button is used.



## 9 - CLEANING



**DO NOT** heat or boil water in a pressure fryer.

Disconnect main power supply. Keep cover and pressure regulating valve **OPEN** when cooking well contains water. If cover is **CLOSED** on a well holding hot or boiling water, a large quantity of scalding water could spray out when cover is opened causing serious burns.




**Broaster®** cooking well cleaner is an irritant. **DO**

**NOT** take internally. Prolonged skin contact may cause irritation and dryness. Direct eye contact can cause irritation, redness and temporary blurred vision. Ingestion could cause nausea, diarrhea, mucosal and gastric irritation. See first aid instructions on container.



When cleaning with water, use **Broaster®**

**Cooking Well Cleaner #99500. DO NOT** use soaps and detergents. Cooking well cleaner removes unwanted contaminants while also neutralizing harmful acids. These acids, if not removed, may damage cooking well and filter system. To ensure cover remains **OPEN** when cleaning, install cleaning flag #12814 over latch column. Cleaning flag is supplied with each new unit and in cooking well cleaner. Additional cleaning flags can be ordered.

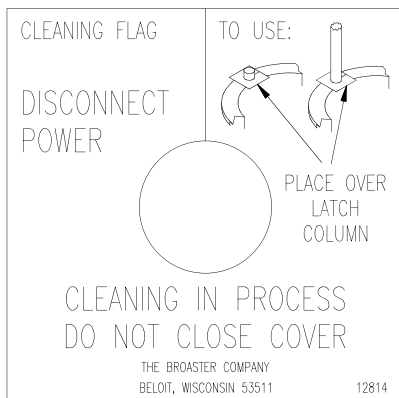

### COOKING WELL

#### NOTICE

Cover and Splash Shield cleaning should be completed before cooking well is cleaned.

1. Turn power switch OFF and disconnect main power supply.
2. Remove filter pan (if your unit has one) from under unit.
3. Drain and discard used oil.
4. OPEN cover and install cleaning flag #12814 over latch column.

#### NOTICE

Quarterly cleaning of Probe Guard (gas & electric) should be done at this point. See **PROBE GUARD & BASKET GUIDE CLEANING.**

5. Close drain valve. Fill cooking well with 14.0 gallons of warm tap water. Thoroughly dissolve 14 oz. of **Broaster®** Cooking Well Cleaner in the water.
6. Soak with cover OPEN for a minimum of 15 minutes. Alternate method: soak overnight up to 12 hours.
7. Drain and discard cleaning mixture.
8. Clean cooking well using a non-metallic heavy duty commercial scouring pad that is USDA approved.
9. Rinse cleaning utensils and cooking well with clear water. Drain and discard rinse water.

cont'd

10. Connect main power supply. Turn power switch on and start the filter pump from filter tab and run for 5 seconds to clear filter lines. Turn filter off, drain and discard mixture.
11. Close drain valve. Wipe inside of cooking well dry before filling with new oil.

## FOOD BASKET

Clean the food basket daily. DO NOT put food basket in a dishwasher. Use warm water and a low suds organic household dish cleanser. Rinse basket with vinegar and water solution (1/2 cup vinegar per gallon of water). Rinse with clear water and completely dry before returning to oil.

## UNIT SURFACES

Frequently wipe off excess oil and crumbs with a clean cloth or paper towel. DO NOT use harsh abrasives and chemicals.



**WARNING** Rags or papers containing cooking oil can catch fire if exposed to heat. Laundering will not remove the oil. Dispose of all oil-soiled papers and rags in a trash container that is in a ventilated area away from all cooking equipment or other heat sources such as direct sunlight.

## CONDENSATE PAN

Check liquid level several times daily. Empty as needed.




**WARNING** Water and hot oil DO NOT mix. DO NOT pour contents into cooking well or filter pan. Hot oil could splash causing serious burns.

## SLIDE RODS

Clean daily along with the cover, see COVER. Wipe with a clean cloth or paper towel. No lubrication is necessary.

## COVER

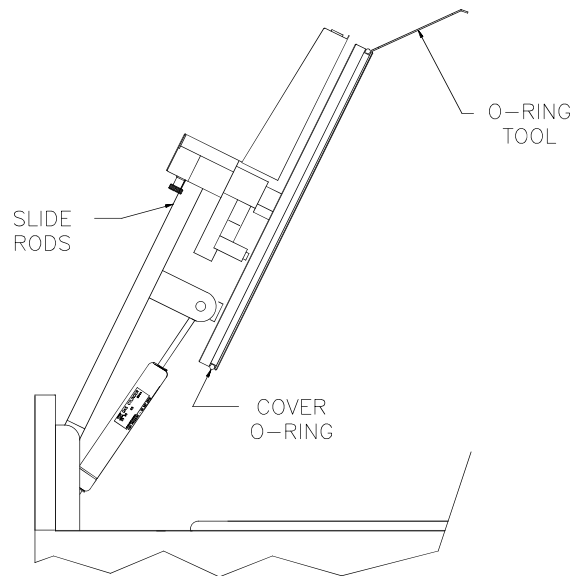

### NOTICE

**Keep a spare O-ring on hand in case of accidental damage.**

1. OPEN cover and slide back until it stops.
2. Raise the cover assembly.
3. Rotate cover handle to CLOSED position. Using O-ring tool #12791 or a small dull tool such as a spoon handle, remove cover O-ring.
4. Clean O-ring using warm water only. DO NOT use detergents. Hold wet rag around O-ring and pull through several times.
5. Clean O-ring groove and cover top and bottom. Use O-ring tool #12791 to clean O-ring groove. Use a non-metallic heavy duty commercial scouring pad that is USDA approved to clean cover.
6. Remove any oil or grease build-up from Pressure Relief Valve and Pressure Gauge Ports on bottom of cover.




7. After cleaning, completely dry. Lubricate O-ring with clean liquid shortening. Install O-ring in O-ring groove.

## SPLASH SHIELD


**⚠ WARNING** Allow cover assembly to cool before cleaning. Hot surfaces could cause serious burns.

Your unit is equipped with a two piece splash guard, clean it according to the following instructions:

1. OPEN cover and slide back.
2. Rotate cover handle (1) to a centered position.

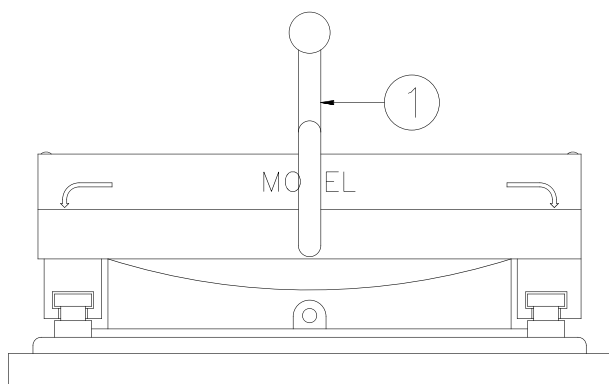

3. Loosen screws (2) attaching back splash shield (3) to splash shield (4).

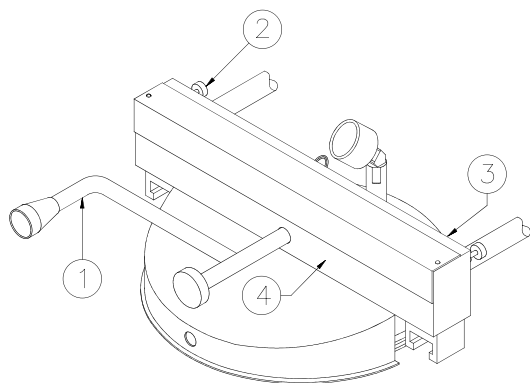

4. Slide splash shield (4) forward towards the end of the cover handle (1).
5. Clean the top and underside of splash shield and top of the cover.

## NOTICE

Make sure back splash shield (3) and splash shield (4) are assembled correctly after cleaning. The cover may not close correctly if they are not.

6. Assemble in reverse order.

## GAS SPRING COVERS

**⚠ WARNING** Allow cover assembly to cool before cleaning. Hot surfaces could cause serious burns.


Your unit is equipped with a gas spring cover, clean it according to the following instructions:

1. Lower the cooking well cover and slide forward until it stops.
2. Loosen thumb screws (1) attaching gas spring cover (2) to yoke assembly (3).
3. Raise the cover off the yoke assembly.
4. Clean the top and underside of the gas spring cover and the yoke assembly.
5. Wipe gas springs with clean cloth or paper towel.
6. Assemble in reverse order.

## Probe Guard & Basket Guides

At least once every 3 months, while cleaning the cooking well, the probe guard and basket guides need to be removed so that any build-up that collects behind them can be cleaned.

1. After emptying the oil and before filling with cleaning solution, remove the probe guard using a flat screwdriver. Remove the probe guard. (See illustrations below)
2. Very carefully remove any debris that is caked on/or around the temperature sensor probe and the hi-limit capillary.
3. On electric fryers, remove the 3 basket guides using a flat screwdriver. Leave the element spacers in place. Carefully clean any build-up that has collected behind the basket guides.

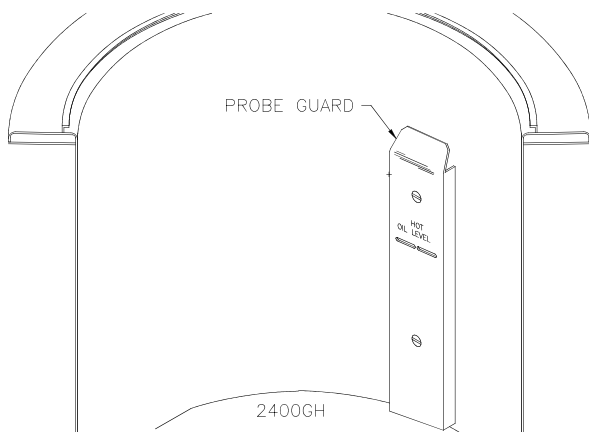


### **CAUTION**

Using too much force in this area could result in damage to either the hi-limit capillary or the temperature sensor probe. If either of these components are damaged, the unit will be inoperable until the component is replaced.

4. Leaving the probe guard and basket guides off, fill the cooking well with cleaning solution and clean normally. The probe guard and basket guides can be placed in the cooking well while soaking.
5. After draining the solution, carefully clean area around the probes and behind the basket guides, and inside of the probe guard and basket guides with a non-metallic scouring pad to completely remove any build-up. Rinse and dry the cooking well.
6. Reinstall the probe guard and basket guides with the appropriate hardware using medium (blue) Threadlock on screw threads.

### **CAUTION**

It is very important to periodically check the screws fastening the probe guard and basket guides to ensure that they do not loosen. If you find that they are coming loose, tighten them immediately.

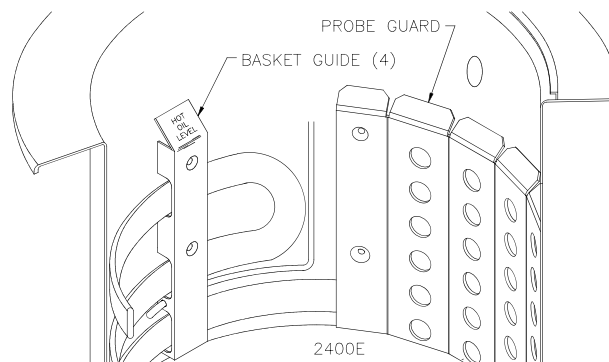

## **MINIMUM PREVENTIVE MAINTENANCE REQUIREMENTS**



Never clean the fryer with a water jet type cleaning machine.

	<b>DAILY</b>	<b>WEEKLY</b>	<b>QUARTERLY</b>
Clean Cooking Well		X	
Clean Condensate Pan	X		
Clean O-Ring		X	
Clean Pressure Relief Valve port & Pressure Gauge Port		X	
Clean Cover and Splash Guard		X	
Clean Food Basket	X		
Clean Filter Pan Cover	After each filtering cycle		
Filter Cooking Oil	See FILTERING		
Clean and Lubricate O-Ring		X	
Slide Rods	X		
Gas Spring Cover		X	
Clean Temperature Sensor		X	
Probe Guard & Basket Guides			X

### **NOTICE**

If cooking volume is high, perform above requirements more frequently.



## 10 - SHUTDOWN

### **WARNING**

If at any time the POWER ON light does not turn off when the power switch is moved to the OFF position, contact your local Broaster Company representative for service immediately.

### **WARNING**

Rags or papers containing cooking oil can catch fire if exposed to heat. Laundering will not remove the oil. Dispose of all oil-soiled papers and rags in a trash container that is in a ventilated area away from all cooking equipment or other heat sources such as direct sunlight.

### **NIGHTLY:**

1. Turn cook/filter switch OFF.
2. Filter cooking oil. See COOKING OIL CARE AND FILTERING.
3. Turn gas valve and manual gas shut off valve to OFF.
4. Wipe oil and crumbs from unit surfaces with a clean cloth or paper towel.
5. Clean food basket.
6. Clean condensate pan.

### **SEASONAL:**

1. See COOKING OIL CARE AND FILTERING. Discard cooking oil.
2. See CLEANING.
3. Turn main circuit breaker OFF and unplug electrical cord.
4. 2400GH: Turn gas valve, manual gas shut off valve and main gas supply OFF.
5. Clean condensate pan.
6. Wipe oil and crumbs from unit surfaces with a clean cloth or paper towel.
7. Lubricate cover O-ring and food basket with olive oil.
8. CLOSE cover and pressure regulating valve.



## 11 - TROUBLESHOOTING

All adjustments and repairs shall be made by an authorized Broaster Company representative.

### ELECTRICAL TIPS

COMPLAINT	CAUSE	REMEDY
<b>Probe Fault</b>	1. Open probe circuit 2. Probe wires reversed 3. Probe changes more than 100°F in two seconds.	1. Replace probe 2. Correct wiring 3. Turn power switch OFF. Contact service person.
<b>HI Temperature</b>	Oil temperature has reached 415°F/213°C.	1. Turn power switch OFF. Contact service person.
<b>Internal Fault</b>	An internal fault has been discovered in the control.	1. Turn power switch OFF. Contact service person.
<b>Heater Fault</b> - appears if the oil temperature is less than 250°F/121°C and the temperature does not raise at least 6°F/4°C during any 6 minute time period.	1. Gas valve switch is off. 2. No gas present. 3. Oil temperature not rising properly.	1. Turn gas valve switch on. 2. Turn main gas valve on. 3. Turn power switch OFF. Contact service person.
<b>C1 Fault</b> (Electric Fryers)	This will appear if power is present at the output of C1 contactor after one second when the power is turned off.	1. Turn power switch OFF. Contact service person.

## **SOLID STATE CONTROLLER TIPS**

<b>COMPLAINT</b>	<b>CAUSE</b>	<b>REMEDY</b>
Display reads INTERNAL FAULT	1. There is a controller failure	1. Turn power switch OFF. Contact service person.
Display reads HI TEMPERATURE	1. Oil temperature too high	1. Turn power switch OFF. Contact service person.
Display reads PROBE FAULT	1. There is a temperature sensor probe failure	1. Turn power switch OFF. Contact service person.
Display reads HEATER FAULT	1. No gas present 2. Oil temperature not rising properly	1. Verify gas supply. 2. Turn power switch OFF. Contact service person.



## 1800GH GAS TIPS

---

COMPLAINT	CAUSE	REMEDY
Pilot burner won't ignite	<ol style="list-style-type: none"><li>1. Gas valve OFF</li><li>2. Air in pilot gas line</li><li>3. Gas shut-off valve OFF</li></ol>	<ol style="list-style-type: none"><li>1. Slide switch to ON</li><li>2. See MODEL 1800GH LIGHTING INSTRUCTIONS</li><li>3. Turn ON</li></ol>
Main burner won't ignite	<ol style="list-style-type: none"><li>1. Pilot burner not lit</li><li>2. Gas control OFF</li><li>3. Controller in Filter, Setup or Help mode</li><li>4. Controller in Filter, Setup or help mode.</li></ol>	<ol style="list-style-type: none"><li>1. See MODEL 1800GH LIGHTING INSTRUCTIONS</li><li>2. Turn ON</li><li>3. Press COOK tab</li><li>4. Press COOK tab.</li></ol>

## COVER AND YOKE TIPS

COMPLAINT	CAUSE	REMEDY
Cover hard to CLOSE	<ol style="list-style-type: none"> <li>1. O-ring dry or dirty</li> <li>2. O-ring groove dirty</li> <li>3. Hard O-ring</li> </ol>	<ol style="list-style-type: none"> <li>1. Clean and lubricate</li> <li>2. Clean</li> <li>3. Replace</li> </ol>
Cover won't OPEN  <b>⚠ WARNING</b> <b>Never use force to OPEN cover.</b>	<ol style="list-style-type: none"> <li>1. O-ring dry or dirty</li> <li>2. O-ring groove dirty</li> <li>3. Hard O-ring</li> <li>4. Pressure not released</li> <li>5. Pressure regulating valve out of adjustment</li> </ol>	<ol style="list-style-type: none"> <li>1. Clean and lubricate</li> <li>2. Clean</li> <li>3. Replace</li> <li>4. OPEN pressure regulating valve</li> <li>5. Contact service person</li> </ol>
O-ring Break  <b>⚠ CAUTION</b> <b>DO NOT rest basket on top flange of cooking well. Damage to area in contact with o-ring can cause leaking under pressure or O-ring failure.</b>	<ol style="list-style-type: none"> <li>1. O-ring groove dirty</li> <li>2. Nicks in cooking well or cover</li> </ol>	<ol style="list-style-type: none"> <li>1. Clean</li> <li>2. Remove</li> </ol>
Pressure Gauge does not indicate rising pressure when exhaust valve is closed.	<ol style="list-style-type: none"> <li>1. Port is plugged</li> <li>2. Pressure gauge is damaged</li> </ol>	<ol style="list-style-type: none"> <li>1. Clean port on bottom of cover</li> <li>2. Replace pressure gauge</li> </ol>

## PRESSURE SYSTEM TIPS



**DO NOT attempt to tighten, repair or replace any fitting, line or component when there is pressure in the cooking well. Hot oil could spray out under pressure causing serious burns.**

COMPLAINT	CAUSE	REMEDY
No pressure	<ol style="list-style-type: none"> <li>1. Pressure regulating valve OPEN</li> <li>2. Pressure regulating valve dirty or blocked open</li> <li>3. Leaks around cover O-ring</li> </ol>	<ol style="list-style-type: none"> <li>1. CLOSE</li> <li>2. Contact service person</li> <li>3. Replace O-ring</li> </ol>
Excess pressure		<ol style="list-style-type: none"> <li>1. Turn power switch OFF. Contact service person.</li> </ol>

## PRODUCT TIPS

### Fresh Chicken:

COMPLAINT	CAUSE	REMEDY
Product too light	<ol style="list-style-type: none"> <li>1. Low oil temperature</li> <li>2. No coating</li> <li>3. Not done</li> <li>4. Food basket overloaded</li> </ol>	<ol style="list-style-type: none"> <li>1. Check cook temperature</li> <li>2. Check procedures</li> <li>3. Increase cook time</li> <li>4. Decrease load</li> </ol>
Product too dark	<ol style="list-style-type: none"> <li>1. High oil temperature</li> <li>2. Wrong coating</li> <li>3. Breaded too long</li> <li>4. Old oil</li> <li>5. Breaded too wet</li> </ol>	<ol style="list-style-type: none"> <li>1. Check cook temperature</li> <li>2. Check procedures</li> <li>3. Discard</li> <li>4. Change oil</li> <li>5. Drain thoroughly prior to breading</li> </ol>
Product not done	<ol style="list-style-type: none"> <li>1. Low oil temperature</li> <li>2. Food basket overloaded</li> <li>3. Cook time too short</li> </ol>	<ol style="list-style-type: none"> <li>1. Check cook temperature</li> <li>2. Decrease load</li> <li>3. Increase cook time</li> </ol>
No flavor	<ol style="list-style-type: none"> <li>1. Improper marination</li> </ol>	<ol style="list-style-type: none"> <li>1. Check procedures</li> </ol>
White spots	<ol style="list-style-type: none"> <li>1. Product stuck together</li> <li>2. Food basket overloaded</li> </ol>	<ol style="list-style-type: none"> <li>1. Float basket while loading</li> <li>2. Decrease load size</li> </ol>
Dark spots	<ol style="list-style-type: none"> <li>1. Dirty oil</li> </ol>	<ol style="list-style-type: none"> <li>1. Filter or replace</li> </ol>

### Frozen IQF Chicken:

COMPLAINT	CAUSE	REMEDY
Product too light	<ol style="list-style-type: none"> <li>1. Low oil temperature</li> <li>2. Not done</li> <li>3. Food basket overloaded</li> </ol>	<ol style="list-style-type: none"> <li>1. Check cook temperature</li> <li>2. Increase cook time</li> <li>3. Decrease load</li> </ol>
Product too dark	<ol style="list-style-type: none"> <li>1. High oil temperature</li> <li>2. Overcooked</li> <li>3. Oil old</li> <li>4. Thawed and refrozen</li> </ol>	<ol style="list-style-type: none"> <li>1. Check cook temperature</li> <li>2. Decrease cook time</li> <li>3. Change oil</li> <li>4. Keep product at 0°F or below</li> </ol>
Product not done	<ol style="list-style-type: none"> <li>1. Low oil temperature</li> <li>2. Food basket overloaded</li> <li>3. Cook time too short</li> </ol>	<ol style="list-style-type: none"> <li>1. Check cook temperature</li> <li>2. Decrease load</li> <li>3. Increase cook time</li> </ol>
No flavor	<ol style="list-style-type: none"> <li>1. Overcooked</li> <li>2. Old product</li> </ol>	<ol style="list-style-type: none"> <li>1. Check cook time</li> <li>2. Discard</li> </ol>
White spots	<ol style="list-style-type: none"> <li>1. Product stuck together</li> <li>2. Food basket overloaded</li> </ol>	<ol style="list-style-type: none"> <li>1. Float basket while loading</li> <li>2. Decrease load size</li> </ol>
Dark spots	<ol style="list-style-type: none"> <li>1. Dirty oil</li> </ol>	<ol style="list-style-type: none"> <li>1. Filter or replace</li> </ol>

## FILTERING TIPS

COMPLAINT	CAUSE	REMEDY
<p>Motor will not start</p> <p><b>⚠ WARNING</b></p> <p><b>Turn power switch to OFF position to avoid splashing of oil when motor protector reset button is pushed.</b></p>	<ol style="list-style-type: none"> <li>1. Overload tripped</li> <li>2. Open or faulty wall fuse or circuit breaker</li> </ol>	<ol style="list-style-type: none"> <li>1. Wait for overload to cool. Push red motor protector reset button located on rear of motor.</li> <li>2. Check wall fuse or circuit breaker</li> </ol>
<p>Motor hums but will not start</p>	<ol style="list-style-type: none"> <li>1. Solidified shortening in pump</li> <li>2. Crumbs in pump</li> </ol>	<ol style="list-style-type: none"> <li>1. Turn cook/filter switch OFF. Contact service person.</li> <li>2. Turn cook/filter switch OFF. Contact service person.</li> </ol>
<p>Motor starts but will not pump</p>	<ol style="list-style-type: none"> <li>1. Filter pan not completely installed</li> <li>2. O-ring on riser line not installed</li> <li>3. Solidified shortening in piping or filter pan</li> </ol>	<ol style="list-style-type: none"> <li>1. Firmly push filter pan in</li> <li>2. See FILTERING</li> <li>3. Turn cook/filter switch OFF. Contact service person.</li> </ol>
<p>Motor starts but will not pump or stops at any level</p>	<ol style="list-style-type: none"> <li>1. Filter paper or hold down improperly installed</li> <li>2. Not using enough Broaster® filtering compound</li> </ol>	<ol style="list-style-type: none"> <li>1. See COOKING OIL CARE AND FILTERING</li> <li>2. Next filtering cycle, make sure proper amount of Broaster® filtering compound is used</li> </ol>
<p>Motor starts but stops pumping when oil is level with top of hold down, approximately 1 inch of oil in bottom</p>	<ol style="list-style-type: none"> <li>1. Filter paper improperly installed or crumbs under filter paper or hold down</li> </ol>	<ol style="list-style-type: none"> <li>1. See COOKING OIL CARE AND FILTERING</li> </ol>





**The Broaster Company**  
2855 Cranston Road, Beloit, WI 53511-3991  
608/365-0193  
**broaster.com**